
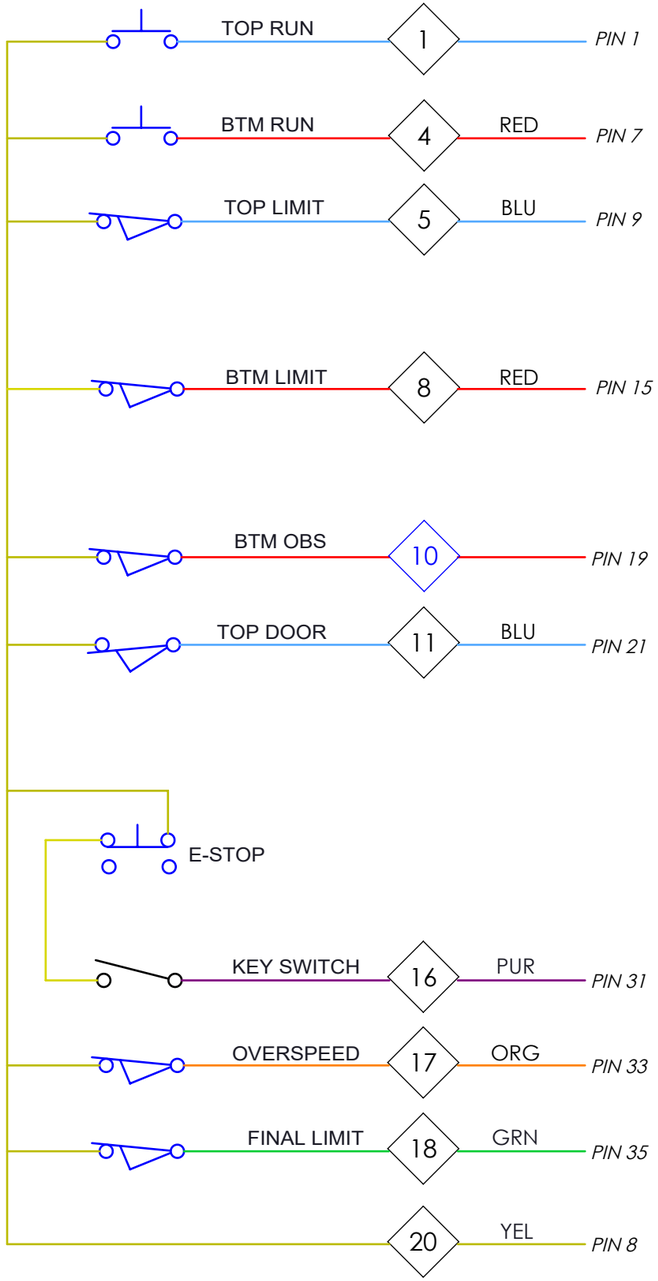


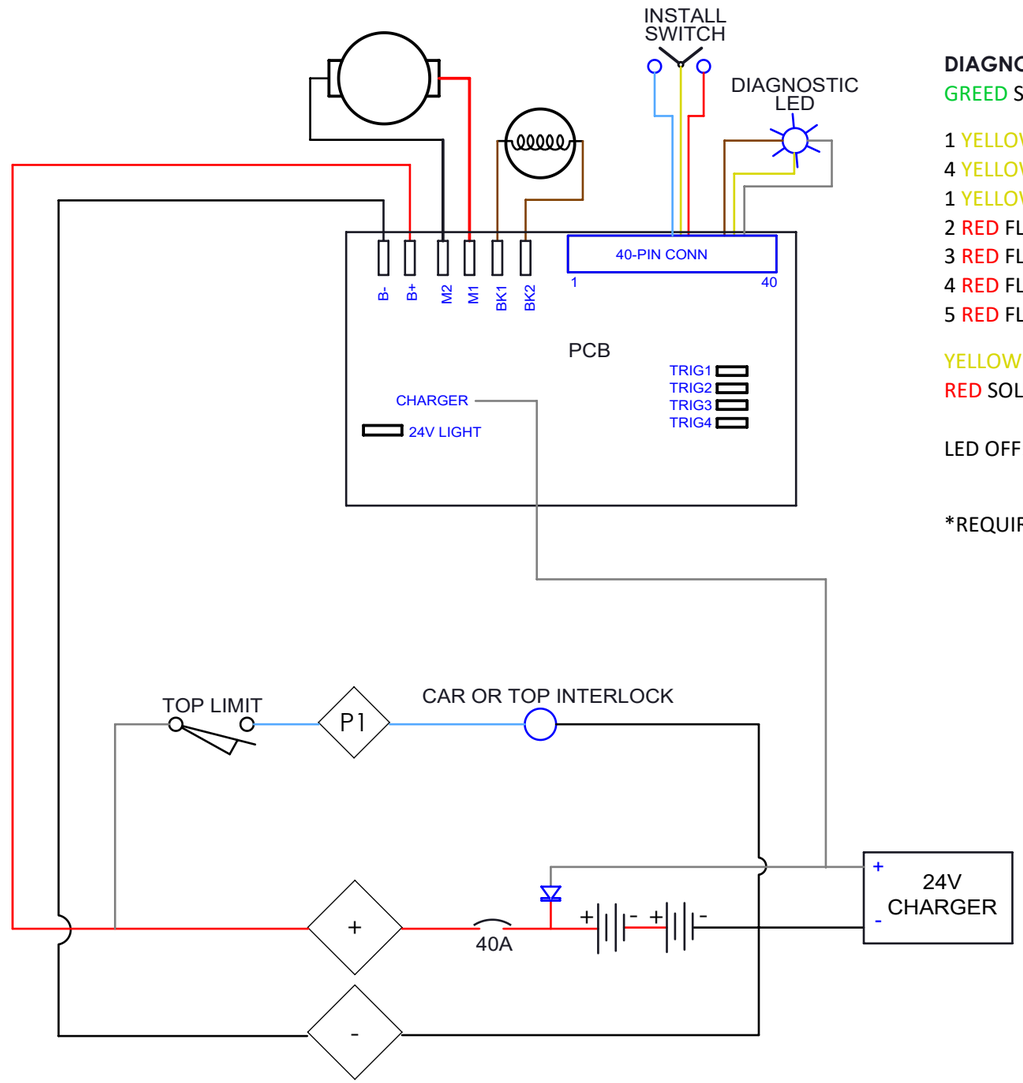

DIAGNOSTIC LED:

GREED SOLID: ALL SYSTEMS NORMAL

1 YELLOW FLASH: CHARGER FAULT
4 YELLOW FLASHES: DOWN OBSTRUCTION
1 YELLOW 1 RED: LANDING DOOR
2 RED FLASHES*: CONFLICTING INPUTS
3 RED FLASHES*: FINAL LIMIT
4 RED FLASHES*: TRAVEL TIMEOUT
5 RED FLASHES*: OVERSPEED DEVICE

YELLOW SOLID W/ RAPID BEEPS: OVERLOAD
RED SOLID: KEYSWITCH TURNED OFF DURING TRAVEL
LED OFF: KEY SWITCH OFF OR PCB NOT POWERED

*REQUIRES POWER TO BE CYCLED OFF/ON

LEGEND:

- X — TERM. STRIP CONN.
- SWITCH - N.C.
- SWITCH - N.O. HELD CLOSED
- SWITCH - N.O.
- PUSH BUTTON
- CIRCUIT BREAKER
- LED
- 12V BATTERY
- OPTIONAL

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ±1/16 ANGULAR: ±0.5° ONE PLACE DECIMAL ±0.1 TWO PLACE DECIMAL ±0.01 THREE PLACE DECIMAL ±0.005	DRAWN		9/1/2020
	CHECKED		
	ENG APPR.		
INTERPRET GEOMETRIC TOLERANCING PER:	MFG APPR.		
MATERIAL	Q.A.		
FINISH	COMMENTS:		
DO NOT SCALE DRAWING			

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STAYING HOME CORPOTATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STAYING HOME CORPORATION IS PROHIBITED.

Staying Home Corporation
2501 Anaconda Rd
Harrisonville, MO 64701
816-380-2427
www.stayinghome.com

TITLE: WIRE DIAGRAM, VL25

SIZE	DWG. NO.	REV
B	74200	A

SCALE: 1:1 WEIGHT: SHEET 1 OF 1