


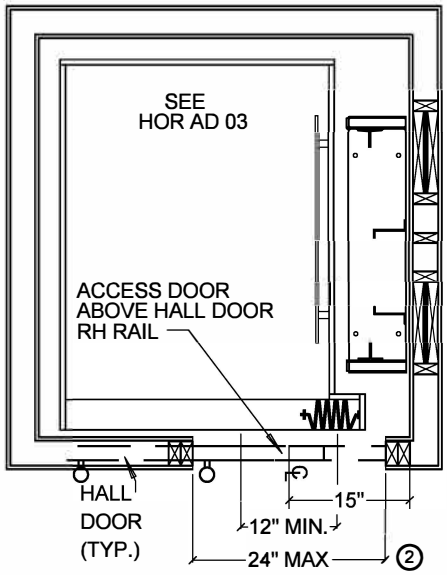


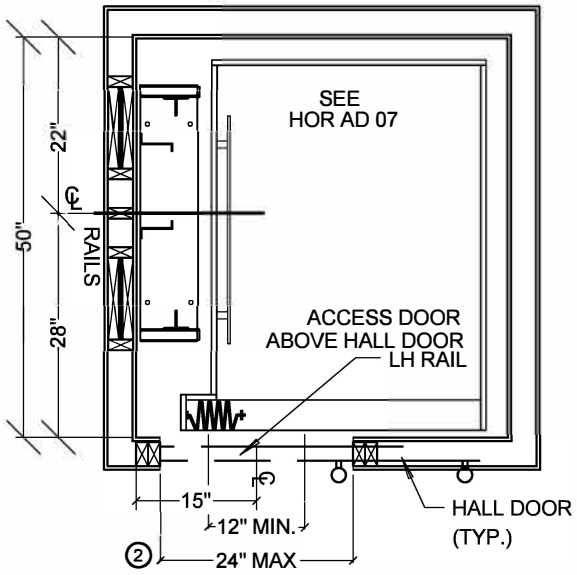

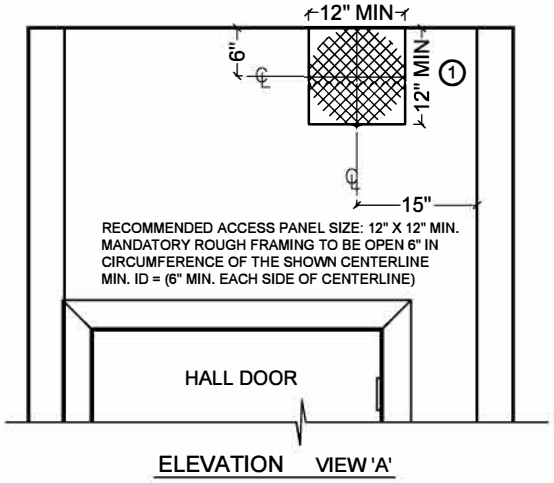

ELEVATION VIEW 'A'

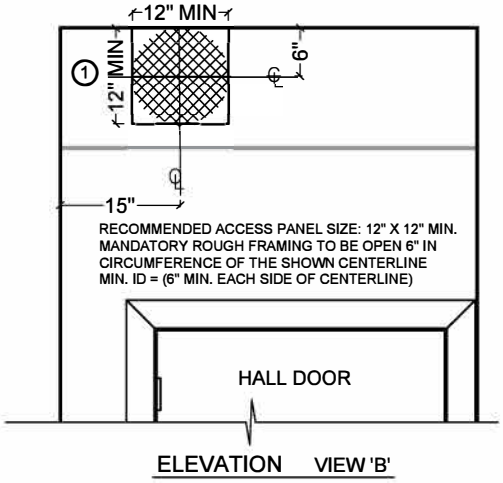

ELEVATION VIEW 'B'

ACCESS DOOR BY GENERAL CONTRACTOR.
* ANY OTHER CONFIGURATION WILL NEED TO BE CONSULTED WITH PRODUCTION PRIOR TO CONSTRCUTION.

① RECOMMENDED CLEARANCE FOR ACCESS TO MOTOR / GEARBOX WITH ACCESS DOOR ABOVE DOOR OF SHAFT.

② RECOMMENDED ACCESS PANEL ROUGH FRAMING SIZES ARE 12" X 12" MIN. WIDTH & 24" X 24" MAX WIDTH TO BE OPEN IN CIRCUMFERENCE OF THE SHOWN CENTERLINE

ALL DIMENSIONS ARE BASED ON INFRA-DRIVE SPECS

OVERHEAD REQUIREMENTS:
96" MINIMUM FOR 6'8" CAB
102" MINIMUM FOR 7'4" CAB
110" MINIMUM FOR 8'0" CAB

THE INFORMATION CONTAINED HEREIN IS SOLELY OWNED BY RESIDENTIAL ELEVATORS ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION FROM RESIDENTIAL ELEVATORS IS STRICTLY PROHIBITED.

RESIDENTIAL ELEVATORS
Elevating Your Standard of Living

©2024 ResidentialElevators.com 0154 05.29.24