

REI Power Door Operator


The REI Power Door operator is available in 3 Colors, Duranodic (Dark Bronze), Taupe (Ivory) and Mill Finish (Silver). The Operator mounts beside the door as shown below. The door operator runs on 120 Volt power, the power head cord is only 2 Feet long. The 120 Volt receptacle must be installed on as shown in the example below so the 2 Ft cord will reach without modification. Note: There must be framing in the area where the Door Operator power head is going to be mounted. The Door Operator standard mounting is shown on the left, above the door attached to the door header. If there is limited overhead the alternate mounting is shown on the right, beside the door. (For alternate mounting there must be framing beside the door to anchor the Power Head to)

Door Operator
Power Head

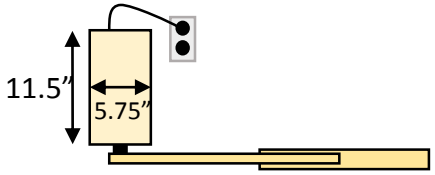


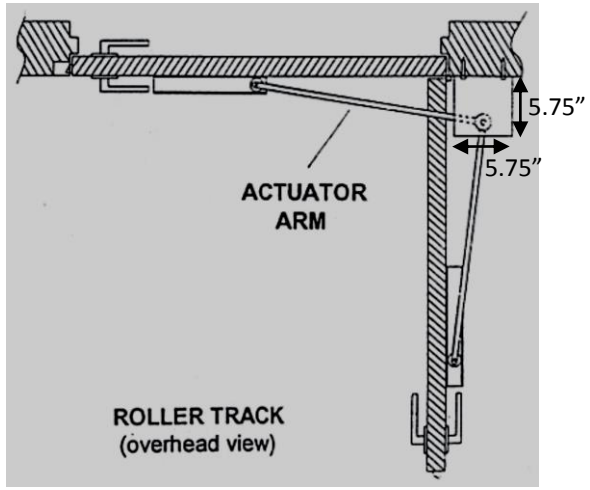

Door Operator
Standard Mounting
(mounted to door header)

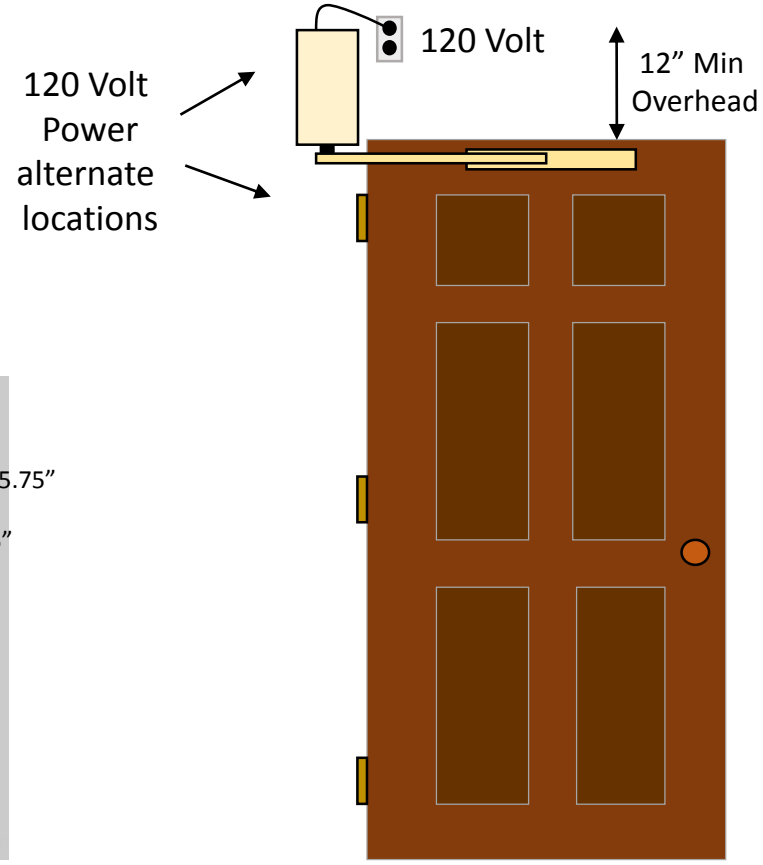


Door Operator
Alternate Mounting
(mounted beside door,
framing required)

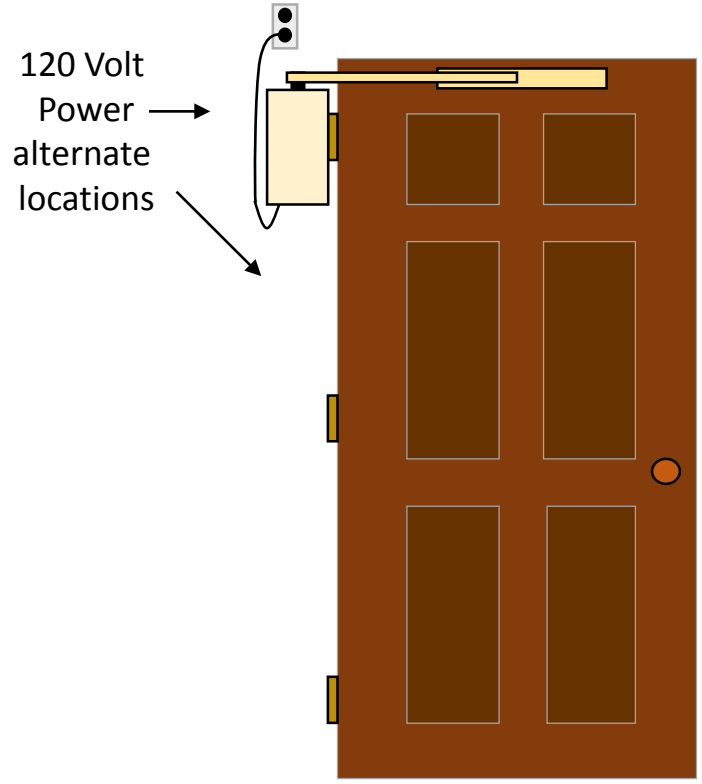

Dura Swing Power Door Opener Connection Board


Control Connection Terminals


Motor Leads
Reverse leads
to change
direction of
operation

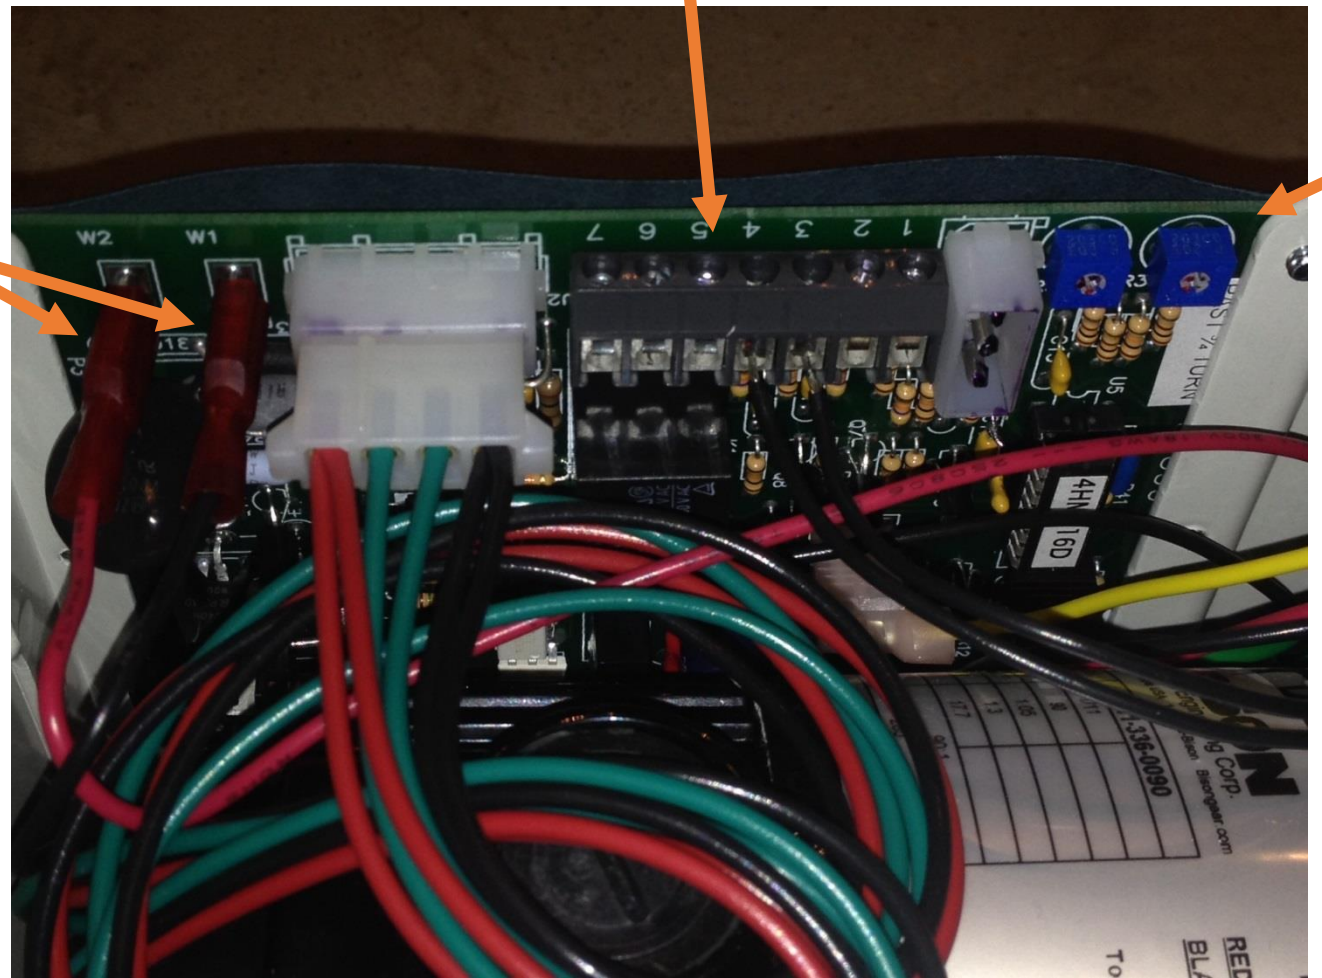

Speed
adjustment
pots

Power Door Opener Control Connections

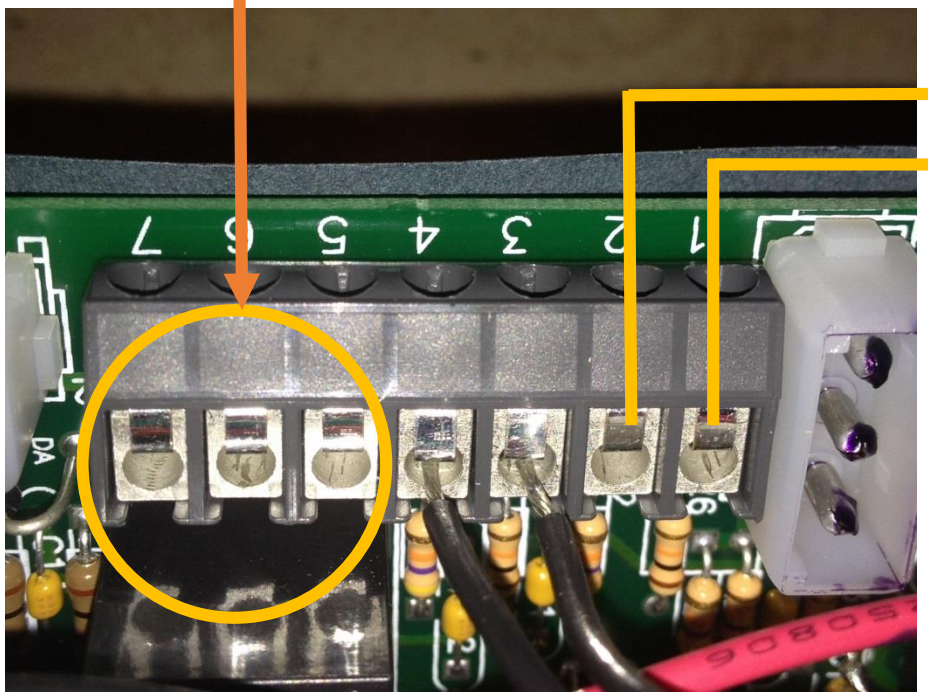

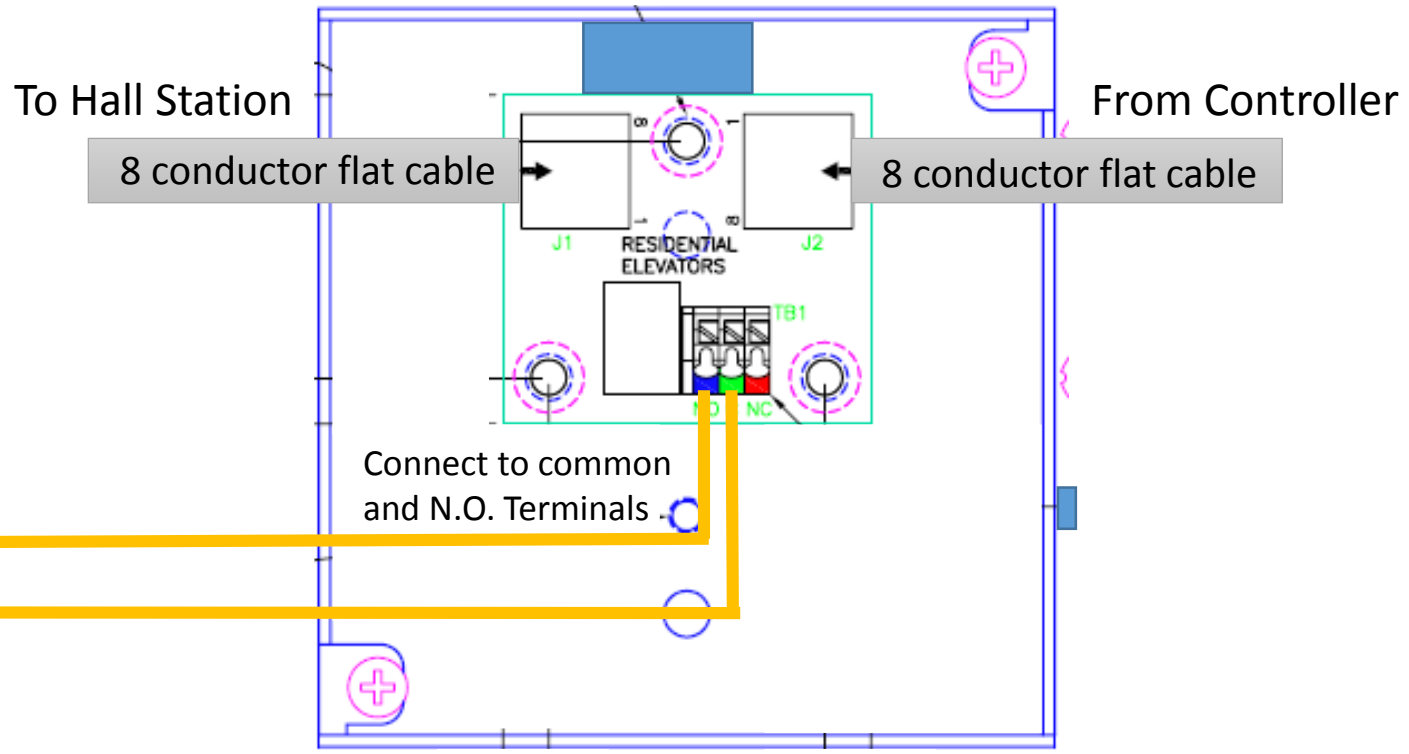

Power Door Opener
Adjustment Pots

Hold Open Time Adjustment
Note: This controls the Delay time
before the door closes after
the door open signal is removed.
Set to Minimum time setting

Door Open Angle Adjustment
(Factory set to ¾ Open)
Adjust to open door to 90 degrees

