
HOR HP2 MG 15

950#, LH RAIL, IN-LINE OPENING, MILLENNIUM GATE, 15 SQ. FT.

PITLESS TRACTION (LLP)

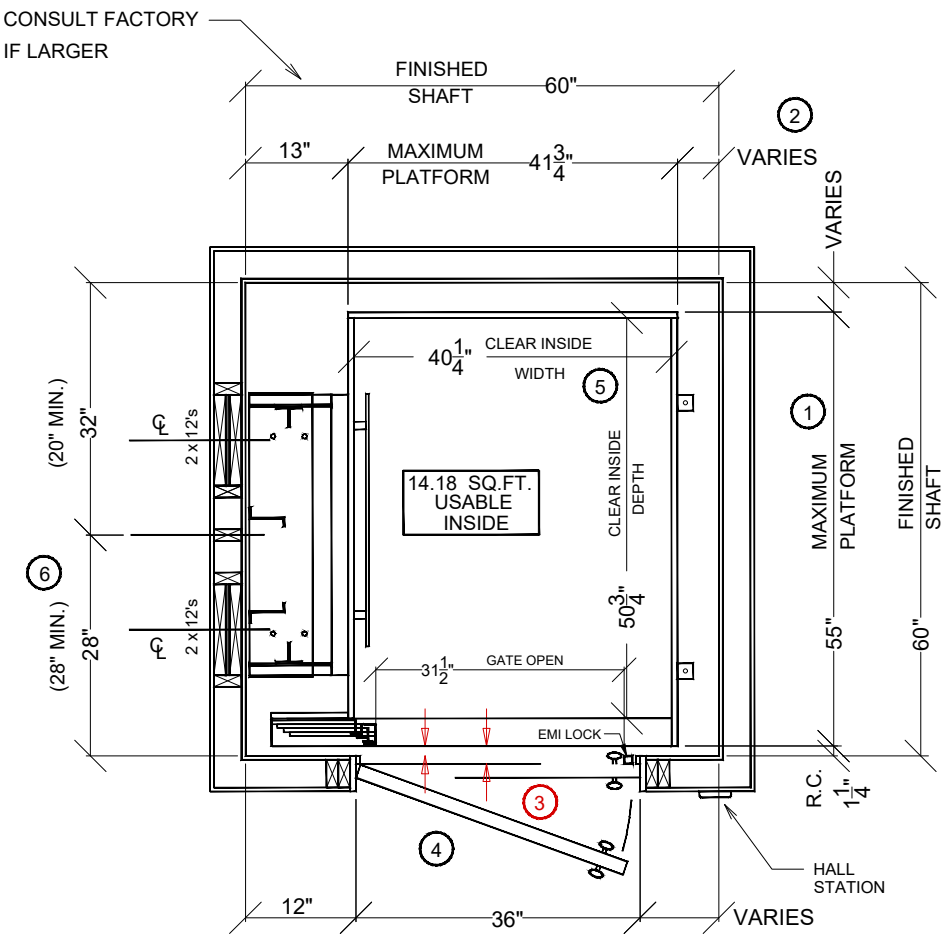

NOTES:

1. IF PLATFORM SIZE IS REDUCED, THEN THE BLOCKING IS TO BE POSITIONED SUCH THAT IT IS CENTERED ON THE PLATFORM. (PLATFORM DEPTH / 2) + 2" = CENTERLINE OF RAIL BLOCKING OFF OF INSIDE FRONT WALL. (MIN. 28" DIMENSION)
2. CAR TO WALL (CTW) DIMENSION VARIES
3. **HOISTWAY DOORS & FRAMES MUST BE INSTALLED TO COMPLY WITH THE AUTHORITY HAVING JURISDICTION REQUIREMENTS. THESE DIMENSIONS VARY. CONSULT YOUR RESIDENTIAL ELEVATORS SALES REPRESENTATIVE FOR DETAILS PRIOR TO CONSTRUCTION.**
4. HOISTWAY DOORS TO BE SOLID CORE (BY OTHERS.)
5. CLEAR CAB DIMENSIONS BASED ON A 3/4" FLAT WALL CAB DESIGN.
6. MIN. CLEARANCE TO ALLOW FOR MOTOR/ BRAKE/ GEARBOX

HOISTWAY TOLERANCES					
	RETURN (RAIL SIDE ONLY)	WIDTH		DEPTH	
		MIN.	MAX.	MIN.	MAX.
15 SQFT	12"	60"		60"	
SINGLE ENTRY	12"	60"	66"	60"	66"
PASS THRU	12"	60"	66"	59 1/2"	60 1/2"

STANDARD HOISTWAY PLAN


NOTE: ALL DIMENSIONS ARE APPROXIMATE

All Traction Elevators require an access panel for emergency lowering. Access panel size and location must be discussed with your Residential Elevators Sales Representative prior to construction.

THE INFORMATION CONTAINED HEREIN IS SOLELY OWNED BY RESIDENTIAL ELEVATORS ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION FROM RESIDENTIAL ELEVATORS IS STRICTLY PROHIBITED.

RESIDENTIAL ELEVATORS
Elevating Your Standard of Living
ResidentialElevators.com
800.832.2004

HOR HP1 AC 10 — 950#, RH RAIL, IN-LINE OPENING, ACCORDION GATE, 10 SQ. FT. — PITLESS TRACTION (LLP)

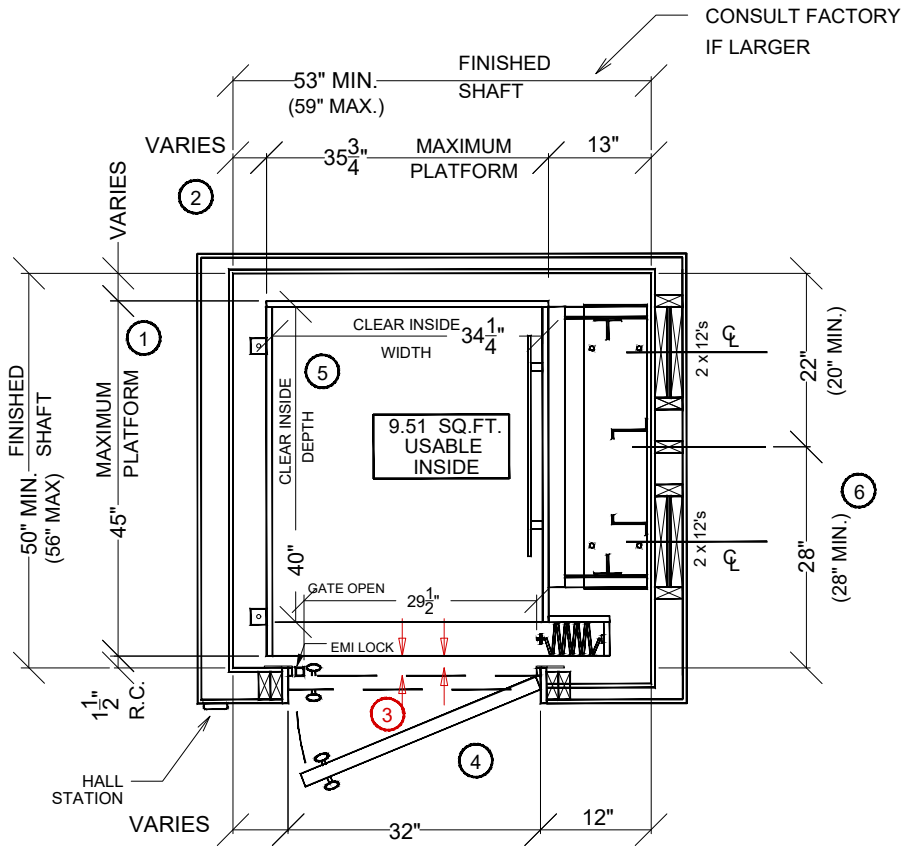

STANDARD HOISTWAY PLAN

NOTE: ALL DIMENSIONS ARE APPROXIMATE

NOTES:

1. IF PLATFORM SIZE IS REDUCED, THEN THE BLOCKING IS TO BE POSITIONED SUCH THAT IT IS CENTERED ON THE PLATFORM. (PLATFORM DEPTH / 2) + 2" = CENTERLINE OF RAIL BLOCKING OFF OF INSIDE FRONT WALL. (MIN. 28" DIMENSION)
2. CAR TO WALL (CTW) DIMENSION IS VARIES
3. **HOISTWAY DOORS & FRAMES MUST BE INSTALLED TO COMPLY WITH THE AUTHORITY HAVING JURISDICTION REQUIREMENTS. THESE DIMENSIONS VARY. CONSULT YOUR RESIDENTIAL ELEVATORS SALES REPRESENTATIVE FOR DETAILS PRIOR TO CONSTRUCTION.**
4. HOISTWAY DOORS TO BE SOLID CORE (BY OTHERS.) HOISTWAY DOORS TO BE 32" MAX (2'-8")
5. CLEAR CAB DIMENSIONS BASED ON A 3/4" FLAT WALL CAB DESIGN.
6. MIN. CLEARANCE TO ALLOW FOR MOTOR/ BRAKE/ GEARBOX
7. 39" POWER GATE OPERATOR ONLY WITH 10 SQFT CAB DESIGN.

HOISTWAY TOLERANCES					
	RETURN (RAIL SIDE ONLY)	WIDTH		DEPTH	
		MIN.	MAX.	MIN.	MAX.
10 SQFT	12"	53"		50"	
SINGLE ENTRY	12"	53"	59"	50"	56"
PASS THRU SCISSOR ONLY	12"	53"	59"	49 1/2"	50 1/2"

All Traction Elevators require an access panel for emergency lowering. Access panel size and location must be discussed with your Residential Elevators Sales Representative prior to construction.


THE INFORMATION CONTAINED HEREIN IS SOLELY OWNED BY RESIDENTIAL ELEVATORS ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION FROM RESIDENTIAL ELEVATORS IS STRICTLY PROHIBITED.

RESIDENTIAL ELEVATORS
Elevating Your Standard of Living
ResidentialElevators.com
800.832.2004

HOR HP1 AC 12

950#, RH RAIL, IN-LINE OPENING, ACCODION GATE, 12 SQ. FT.

PITLESS TRACTION (LLP)

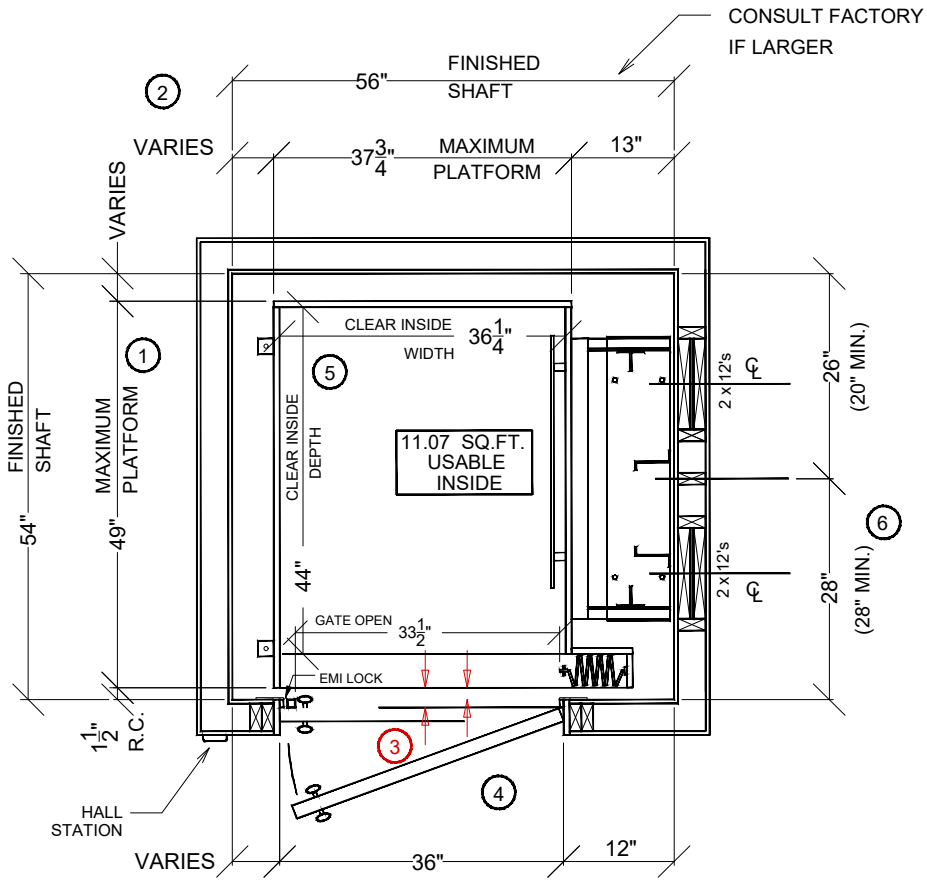

NOTES:

1. IF PLATFORM SIZE IS REDUCED, THEN THE BLOCKING IS TO BE POSITIONED SUCH THAT IT IS CENTERED ON THE PLATFORM. (PLATFORM DEPTH / 2) + 2" = CENTERLINE OF RAIL BLOCKING OFF OF INSIDE FRONT WALL. (MIN. 28" DIMENSION)
2. CAR TO WALL (CTW) DIMENSION VARIES
3. **HOISTWAY DOORS & FRAMES MUST BE INSTALLED TO COMPLY WITH THE AUTHORITY HAVING JURISDICTION REQUIREMENTS. THESE DIMENSIONS VARY. CONSULT YOUR RESIDENTIAL ELEVATORS SALES REPRESENTATIVE FOR DETAILS PRIOR TO CONSTRUCTION.**
4. HOISTWAY DOORS TO BE SOLID CORE (BY OTHERS.)
5. CLEAR CAB DIMENSIONS BASED ON A 3/4" FLAT WALL CAB DESIGN.
6. MIN. CLEARANCE TO ALLOW FOR MOTOR/ BRAKE/ GEARBOX

HOISTWAY TOLERANCES					
	RETURN (RAIL SIDE ONLY)	WIDTH		DEPTH	
		MIN.	MAX.	MIN.	MAX.
12 SQFT	12"	56"		54"	
SINGLE ENTRY	12"	56"	62"	54"	60"
PASSTHRU	12"	56"	62"	53 1/2"	54 1/2"

STANDARD HOISTWAY PLAN


NOTE: ALL DIMENSIONS ARE APPROXIMATE

All Traction Elevators require an access panel for emergency lowering. Access panel size and location must be discussed with your Residential Elevators Sales Representative prior to construction.

THE INFORMATION CONTAINED HEREIN IS SOLELY OWNED BY RESIDENTIAL ELEVATORS ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION FROM RESIDENTIAL ELEVATORS IS STRICTLY PROHIBITED.

RESIDENTIAL ELEVATORS
Elevating Your Standard of Living
ResidentialElevators.com
800.832.2004

HOR HP1 AC 15 — 950#, RH RAIL, IN-LINE OPENING, ACCORDION GATE, 15 SQ. FT. — PITLESS TRACTION (LLP)

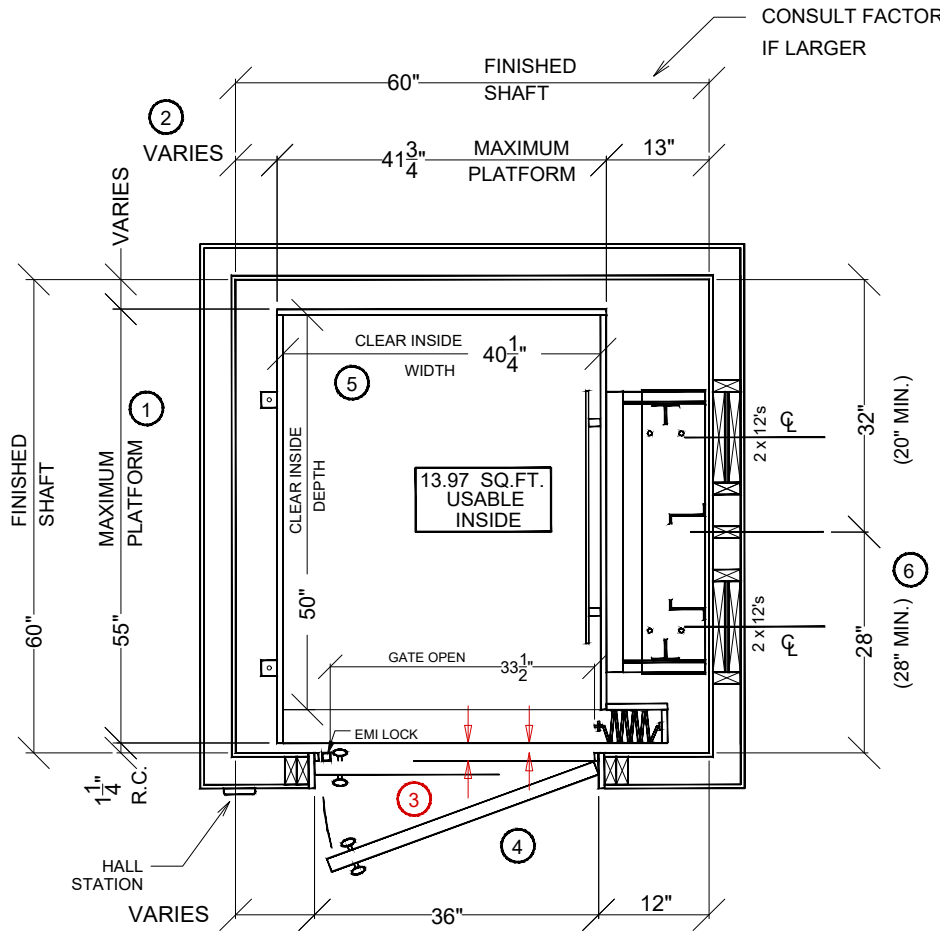

NOTES:

1. IF PLATFORM SIZE IS REDUCED, THEN THE BLOCKING IS TO BE POSITIONED SUCH THAT IT IS CENTERED ON THE PLATFORM. (PLATFORM DEPTH / 2) + 2" = CENTERLINE OF RAIL BLOCKING OFF OF INSIDE FRONT WALL. (MIN. 28" DIMENSION)
2. CAR TO WALL (CTW) DIMENSION IS VARIES
3. **HOISTWAY DOORS & FRAMES MUST BE INSTALLED TO COMPLY WITH THE AUTHORITY HAVING JURISDICTION REQUIREMENTS. THESE DIMENSIONS VARY. CONSULT YOUR RESIDENTIAL ELEVATORS SALES REPRESENTATIVE FOR DETAILS PRIOR TO CONSTRUCTION.**
4. HOISTWAY DOORS TO BE SOLID CORE (BY OTHERS.)
5. CLEAR CAB DIMENSIONS BASED ON A 3/4" FLAT WALL CAB DESIGN.
6. MIN. CLEARANCE TO ALLOW FOR MOTOR/ BRAKE/ GEARBOX

HOISTWAY TOLERANCES					
	RETURN (RAIL SIDE ONLY)	WIDTH		DEPTH	
		MIN.	MAX.	MIN.	MAX.
15 SQFT	12"	60"		60"	
SINGLE ENTRY	12"	60"	66"	60"	66"
PASS THRU	12"	60"	66"	59 1/2"	60 1/2"

STANDARD HOISTWAY PLAN


NOTE: ALL DIMENSIONS ARE APPROXIMATE

All Traction Elevators require an access panel for emergency lowering. Access panel size and location must be discussed with your Residential Elevators Sales Representative prior to construction.

THE INFORMATION CONTAINED HEREIN IS SOLELY OWNED BY RESIDENTIAL ELEVATORS ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION FROM RESIDENTIAL ELEVATORS IS STRICTLY PROHIBITED.

RESIDENTIAL ELEVATORS
Elevating Your Standard of Living
ResidentialElevators.com
800.832.2004

HOR HP2 MG 12 — 950#, LH RAIL, IN-LINE OPENING, MILLENNIUM GATE, 12 SQ. FT. — PITLESS TRACTION (LLP)

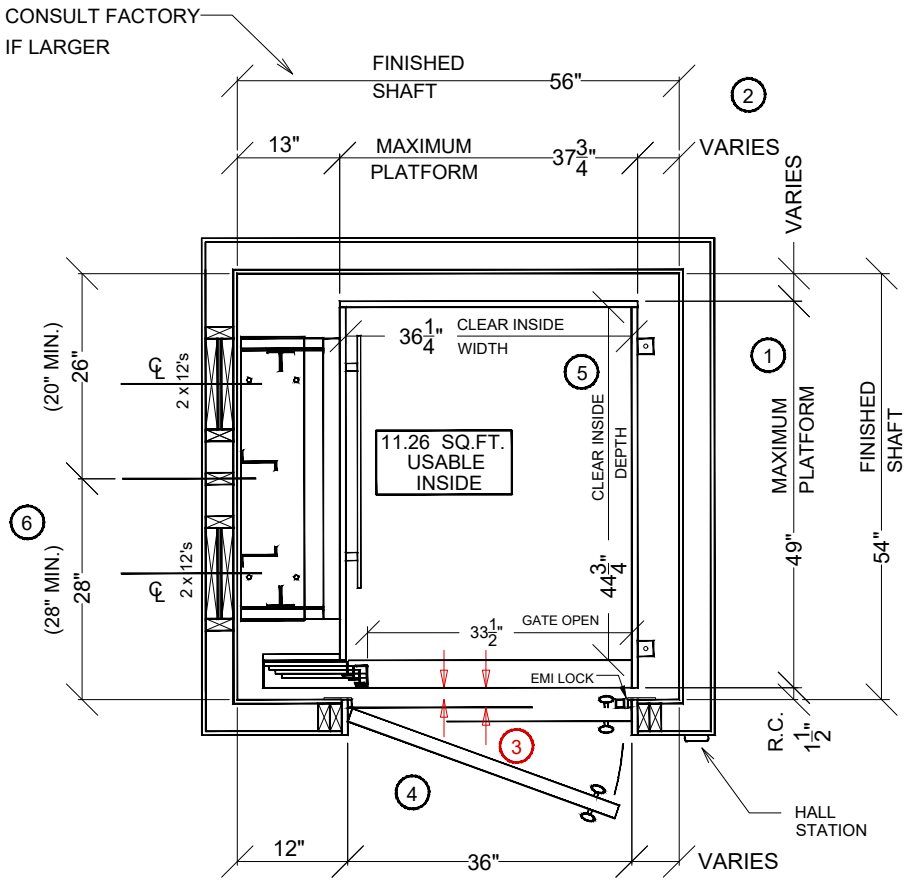

NOTES:

1. IF PLATFORM SIZE IS REDUCED, THEN THE BLOCKING IS TO BE POSITIONED SUCH THAT IT IS CENTERED ON THE PLATFORM. (PLATFORM DEPTH / 2) + 2" = CENTERLINE OF RAIL BLOCKING OFF OF INSIDE FRONT WALL. (MIN. 28" DIMENSION)
2. CAR TO WALL (CTW) DIMENSION VARIES
3. **HOISTWAY DOORS & FRAMES MUST BE INSTALLED TO COMPLY WITH THE AUTHORITY HAVING JURISDICTION REQUIREMENTS. THESE DIMENSIONS VARY. CONSULT YOUR RESIDENTIAL ELEVATORS SALES REPRESENTATIVE FOR DETAILS PRIOR TO CONSTRUCTION.**
4. HOISTWAY DOORS TO BE SOLID CORE (BY OTHERS.)
5. CLEAR CAB DIMENSIONS BASED ON A 3/4" FLAT WALL CAB DESIGN.
6. MIN. CLEARANCE TO ALLOW FOR MOTOR/ BRAKE/ GEARBOX

HOISTWAY TOLERANCES					
	RETURN (RAIL SIDE ONLY)	WIDTH		DEPTH	
		MIN.	MAX.	MIN.	MAX.
12 SQFT	12"	56"		54"	
SINGLE ENTRY	12"	56"	62"	54"	60"
PASSTHRU	12"	56"	62"	53 1/2"	54 1/2"

STANDARD HOISTWAY PLAN


NOTE: ALL DIMENSIONS ARE APPROXIMATE

All Traction Elevators require an access panel for emergency lowering. Access panel size and location must be discussed with your Residential Elevators Sales Representative prior to construction.

THE INFORMATION CONTAINED HEREIN IS SOLELY OWNED BY RESIDENTIAL ELEVATORS ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION FROM RESIDENTIAL ELEVATORS IS STRICTLY PROHIBITED.

RESIDENTIAL ELEVATORS
Elevating Your Standard of Living
ResidentialElevators.com
800.832.2004

HOR HP4 AC 12 — 950#, RH RAIL, FRONT/REAR OPENING, ACCORDION GATE GATE, 12 SQ. FT. — PITLESS TRACTION (LLP)

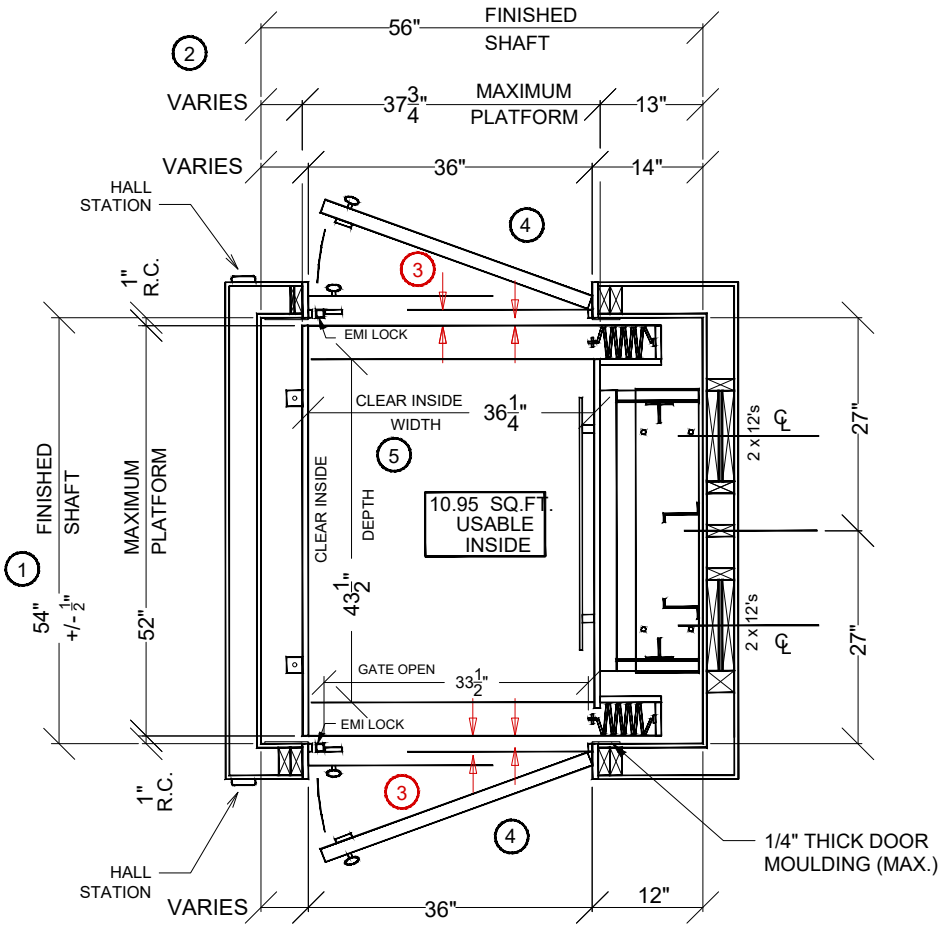

STANDARD HOISTWAY PLAN

NOTE: ALL DIMENSIONS ARE APPROXIMATE

NOTES:

1. MAXIMUM HOISTWAY DEPTH TO BE 54" (+/- 1/2")
2. CAR TO WALL (CTW) DIMENSION VARIES
3. **HOISTWAY DOORS & FRAMES MUST BE INSTALLED TO COMPLY WITH THE AUTHORITY HAVING JURISDICTION REQUIREMENTS. THESE DIMENSIONS VARY. CONSULT YOUR RESIDENTIAL ELEVATORS SALES REPRESENTATIVE FOR DETAILS PRIOR TO CONSTRUCTION.**
4. HOISTWAY DOORS TO BE SOLID CORE (BY OTHERS.)
5. CLEAR CAB DIMENSIONS BASED ON A 3/4" FLAT WALL CAB DESIGN.


HOISTWAY TOLERANCES					
	RETURN (RAIL SIDE ONLY)	WIDTH		DEPTH	
		MIN.	MAX.	MIN.	MAX.
12 SQFT	12"	56"		54"	
SINGLE ENTRY	12"	56"	62"	54"	60"
PASSTHRU	12"	56"	62"	53 1/2"	54 1/2"

All Traction Elevators require an access panel for emergency lowering. Access panel size and location must be discussed with your Residential Elevators Sales Representative prior to construction.

THE INFORMATION CONTAINED HEREIN IS SOLELY OWNED BY RESIDENTIAL ELEVATORS ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION FROM RESIDENTIAL ELEVATORS IS STRICTLY PROHIBITED.

RESIDENTIAL ELEVATORS
Elevating Your Standard of Living

HOR HP4 AC15 — 950#, LH RAIL, FRONT/REAR OPENING, ACCORDION GATE, 15 SQ. FT. — PITLESS TRACTION (LLP)

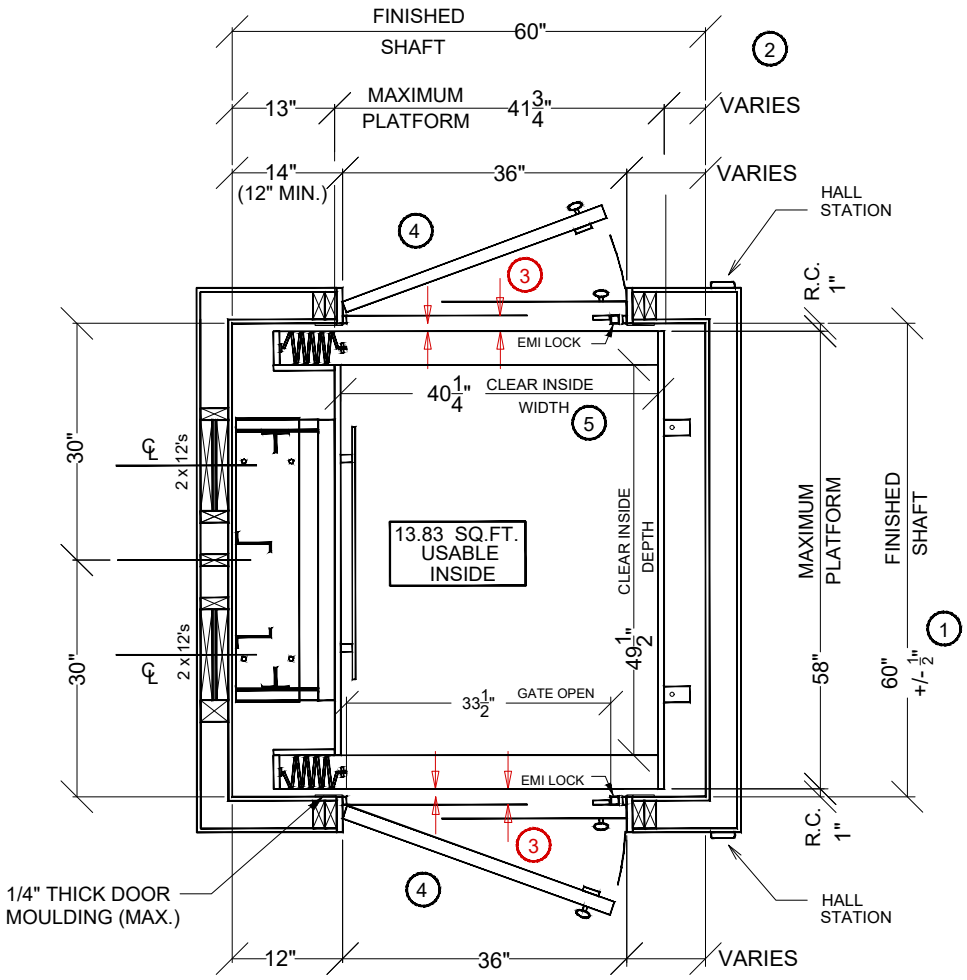

STANDARD HOISTWAY PLAN

NOTE: ALL DIMENSIONS ARE APPROXIMATE

NOTES:

1. MAXIMUM HOISTWAY DEPTH TO BE 60 (+/- 1/2")
2. CAR TO WALL (CTW) DIMENSION VARIES
3. **HOISTWAY DOORS & FRAMES MUST BE INSTALLED TO COMPLY WITH THE AUTHORITY HAVING JURISDICTION REQUIREMENTS. THESE DIMENSIONS VARY. CONSULT YOUR RESIDENTIAL ELEVATORS SALES REPRESENTATIVE FOR DETAILS PRIOR TO CONSTRUCTION.**
4. HOISTWAY DOORS TO BE SOLID CORE (BY OTHERS.)


HOISTWAY TOLERANCES					
	RETURN (RAIL SIDE ONLY)	WIDTH		DEPTH	
		MIN.	MAX.	MIN.	MAX.
15 SQFT	12"	60"		60"	
SINGLE ENTRY	12"	60"	66"	60"	66"
PASS THRU	12"	60"	66"	59 1/2"	60 1/2"

All Traction Elevators require an access panel for emergency lowering. Access panel size and location must be discussed with your Residential Elevators Sales Representative prior to construction.

THE INFORMATION CONTAINED HEREIN IS SOLELY OWNED BY RESIDENTIAL ELEVATORS ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION FROM RESIDENTIAL ELEVATORS IS STRICTLY PROHIBITED.

RESIDENTIAL ELEVATORS
Elevating Your Standard of Living

HOR HP2 SG 10 — 950#, LH RAIL, IN-LINE OPENING, SCISSOR GATE, 10 SQ. FT. — PITLESS TRACTION (LLP)

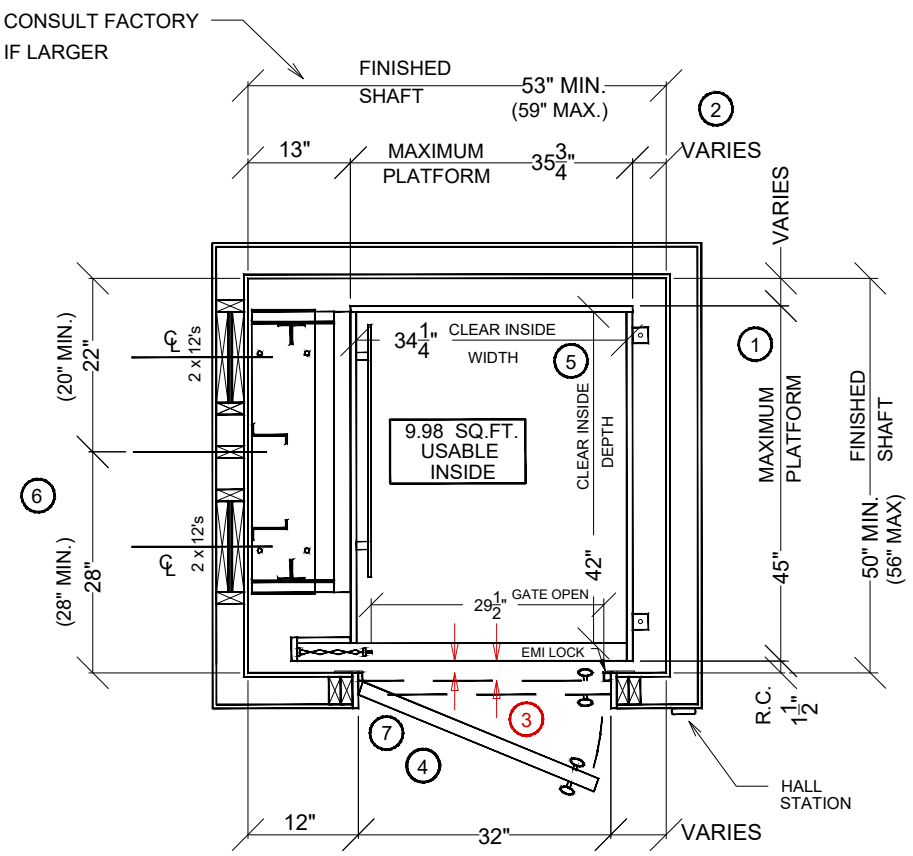

STANDARD HOISTWAY PLAN

NOTE: ALL DIMENSIONS ARE APPROXIMATE

NOTES:

1. IF PLATFORM SIZE IS REDUCED, THEN THE BLOCKING IS TO BE POSITIONED SUCH THAT IT IS CENTERED ON THE PLATFORM. (PLATFORM DEPTH / 2) + 2" = CENTERLINE OF RAIL BLOCKING OFF OF INSIDE FRONT WALL. (MIN. 28" DIMENSION)
2. CAR TO WALL (CTW) DIMENSION VARIES
3. **HOISTWAY DOORS & FRAMES MUST BE INSTALLED TO COMPLY WITH THE AUTHORITY HAVING JURISDICTION REQUIREMENTS. THESE DIMENSIONS VARY. CONSULT YOUR RESIDENTIAL ELEVATORS SALES REPRESENTATIVE FOR DETAILS PRIOR TO CONSTRUCTION.**
4. HOISTWAY DOORS TO BE SOLID CORE (BY OTHERS.) HOISTWAY DOORS TO BE 32" MAX (2'-8")
5. CLEAR CAB DIMENSIONS BASED ON A 3/4" FLAT WALL CAB DESIGN.
6. MIN. CLEARANCE TO ALLOW FOR MOTOR/ BRAKE/ GEARBOX
7. 39" POWER GATE OPERATOR ONLY WITH 10 SQFT CAB DESIGN.

HOISTWAY TOLERANCES					
	RETURN (RAIL SIDE ONLY)	WIDTH		DEPTH	
		MIN.	MAX.	MIN.	MAX.
10 SQFT	12"	53"		50"	
SINGLE ENTRY	12"	53"	59"	50"	56"
PASS THRU SCISSOR ONLY	12"	53"	59"	49 1/2"	50 1/2"

All Traction Elevators require an access panel for emergency lowering. Access panel size and location must be discussed with your Residential Elevators Sales Representative prior to construction.


THE INFORMATION CONTAINED HEREIN IS SOLELY OWNED BY RESIDENTIAL ELEVATORS ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION FROM RESIDENTIAL ELEVATORS IS STRICTLY PROHIBITED.

RESIDENTIAL ELEVATORS
Elevating Your Standard of Living
ResidentialElevators.com
800.832.2004

HOR HP2 SG 12

950#, LH RAIL, IN-LINE OPENING, SCISSOR GATE, 12 SQ. FT.

PITLESS TRACTION (LLP)

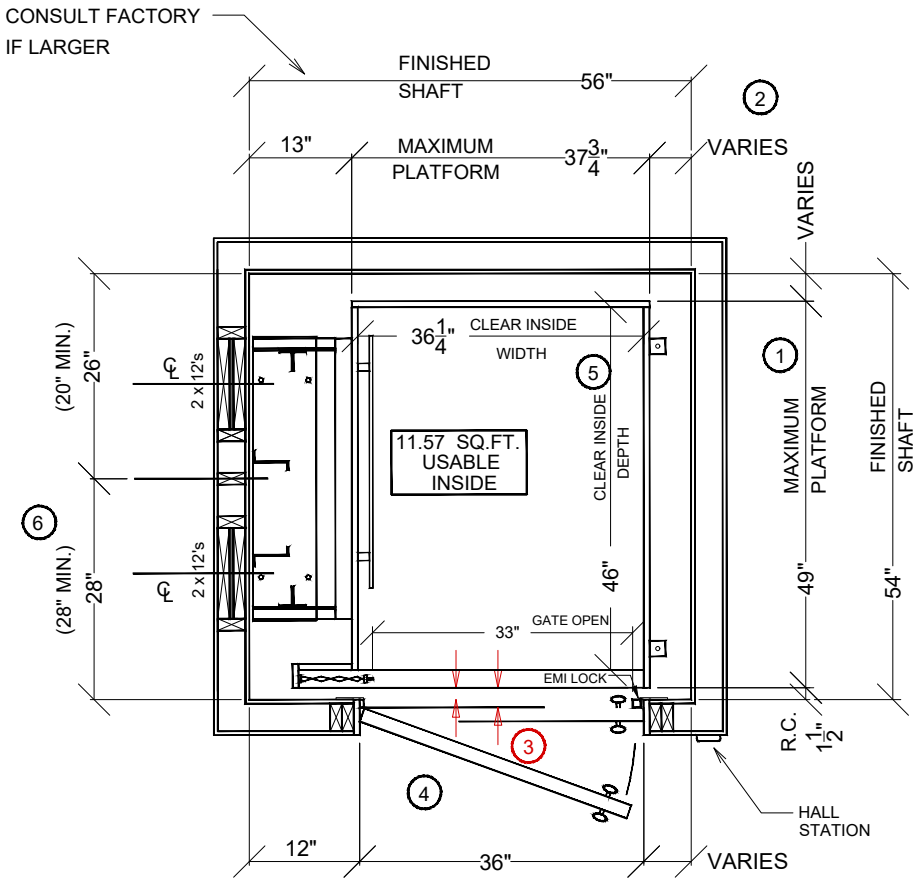

NOTES:

1. IF PLATFORM SIZE IS REDUCED, THEN THE BLOCKING IS TO BE POSITIONED SUCH THAT IT IS CENTERED ON THE PLATFORM. (PLATFORM DEPTH / 2) + 2" = CENTERLINE OF RAIL BLOCKING OFF OF INSIDE FRONT WALL. (MIN. 28" DIMENSION)
2. CAR TO WALL (CTW) DIMENSION VARIES
3. **HOISTWAY DOORS & FRAMES MUST BE INSTALLED TO COMPLY WITH THE AUTHORITY HAVING JURISDICTION REQUIREMENTS. THESE DIMENSIONS VARY. CONSULT YOUR RESIDENTIAL ELEVATORS SALES REPRESENTATIVE FOR DETAILS PRIOR TO CONSTRUCTION.**
4. HOISTWAY DOORS TO BE SOLID CORE (BY OTHERS.)
5. CLEAR CAB DIMENSIONS BASED ON A 3/4" FLAT WALL CAB DESIGN.
6. MIN. CLEARANCE TO ALLOW FOR MOTOR/ BRAKE/ GEARBOX

HOISTWAY TOLERANCES					
	RETURN (RAIL SIDE ONLY)	WIDTH		DEPTH	
		MIN.	MAX.	MIN.	MAX.
12 SQFT	12"	56"		54"	
SINGLE ENTRY	12"	56"	62"	54"	60"
PASSTHRU	12"	56"	62"	53 1/2"	54 1/2"

STANDARD HOISTWAY PLAN

NOTE: ALL DIMENSIONS ARE APPROXIMATE

All Traction Elevators require an access panel for emergency lowering. Access panel size and location must be discussed with your Residential Elevators Sales Representative prior to construction.


THE INFORMATION CONTAINED HEREIN IS SOLELY OWNED BY RESIDENTIAL ELEVATORS ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION FROM RESIDENTIAL ELEVATORS IS STRICTLY PROHIBITED.

RESIDENTIAL ELEVATORS
Elevating Your Standard of Living
ResidentialElevators.com
800.832.2004

HOR HP2 SG 15

950#, LH RAIL, IN-LINE OPENING, SCISSOR GATE, 15 SQ. FT.

PITLESS TRACTION (LLP)

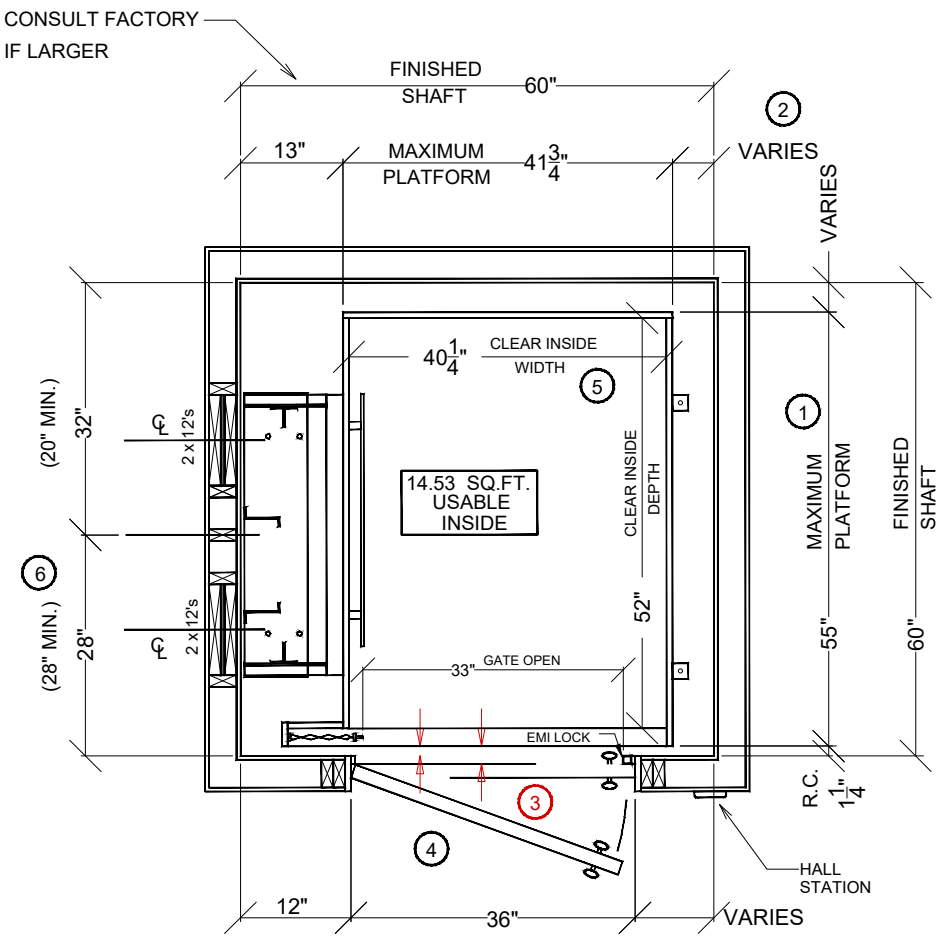

NOTES:

1. IF PLATFORM SIZE IS REDUCED, THEN THE BLOCKING IS TO BE POSITIONED SUCH THAT IT IS CENTERED ON THE PLATFORM. (PLATFORM DEPTH / 2) + 2" = CENTERLINE OF RAIL BLOCKING OFF OF INSIDE FRONT WALL. (MIN. 28" DIMENSION)
2. CAR TO WALL (CTW) DIMENSION VARIES
3. **HOISTWAY DOORS & FRAMES MUST BE INSTALLED TO COMPLY WITH THE AUTHORITY HAVING JURISDICTION REQUIREMENTS. THESE DIMENSIONS VARY. CONSULT YOUR RESIDENTIAL ELEVATORS SALES REPRESENTATIVE FOR DETAILS PRIOR TO CONSTRUCTION.**
4. HOISTWAY DOORS TO BE SOLID CORE (BY OTHERS.)
5. CLEAR CAB DIMENSIONS BASED ON A 3/4" FLAT WALL CAB DESIGN.
6. MIN. CLEARANCE TO ALLOW FOR MOTOR/ BRAKE/ GEARBOX

HOISTWAY TOLERANCES					
	RETURN (RAIL SIDE ONLY)	WIDTH		DEPTH	
		MIN.	MAX.	MIN.	MAX.
15 SQFT	12"	60"		60"	
SINGLE ENTRY	12"	60"	66"	60"	66"
PASS THRU	12"	60"	66"	59½"	60½"

STANDARD HOISTWAY PLAN

NOTE: ALL DIMENSIONS ARE APPROXIMATE

All Traction Elevators require an access panel for emergency lowering. Access panel size and location must be discussed with your Residential Elevators Sales Representative prior to construction.

THE INFORMATION CONTAINED HEREIN IS SOLELY OWNED BY RESIDENTIAL ELEVATORS ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION FROM RESIDENTIAL ELEVATORS IS STRICTLY PROHIBITED.

RESIDENTIAL ELEVATORS
Elevating Your Standard of Living
ResidentialElevators.com
800.832.2004