Staying Home
ELEVATE YOUR LIFE

Model EZ5
Straight-thru Car

ELEVATOR INSTALLATION INSTRUCTIONS

DCN: 26-001-A


The following information has been written to provide clear and precise instructions for proper installation procedures.

Please refer to the Owner's Manual for warranty information and operating instructions. Please call the Service Department at **816-380-2427** if you have questions concerning the installation or service of the elevator.

It is imperative that all information, supplemental prints, labels on equipment, etc. be read and understood prior to attempting installation of the elevator. Depending on options ordered, all instructions may not apply. Also, please observe all cautions and warnings.


Loosely attach the control wall panel to the car mount plates of the sling with 3/8-16 X 3/4" socket head cap screws.

All fasteners to be tightened after the car is assembled.

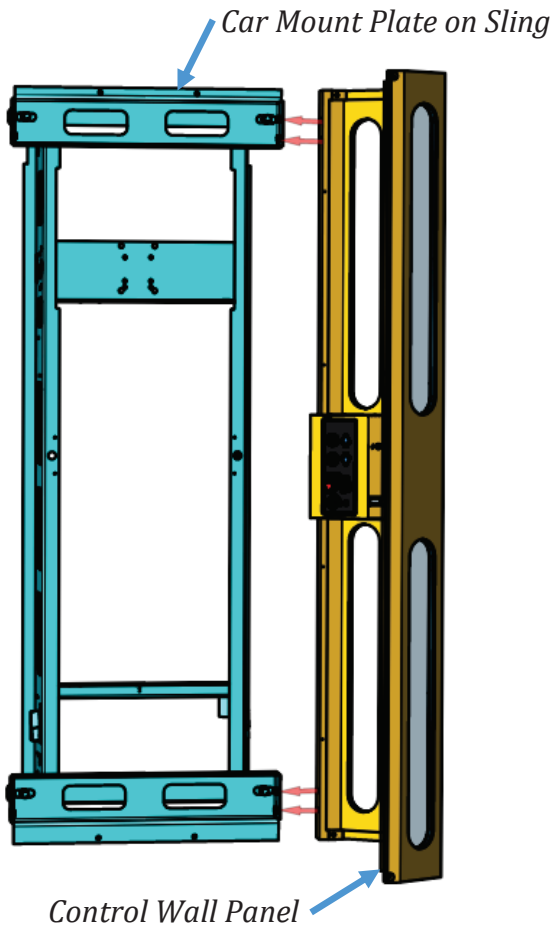


Lower the sling until the lower car mount plate rests on the floor. *This is to hold the car floor level during assembly.*

Loosely attach the car floor to the wall and car mount plate with 3/8-16 X 1/2" socket head cap screws.

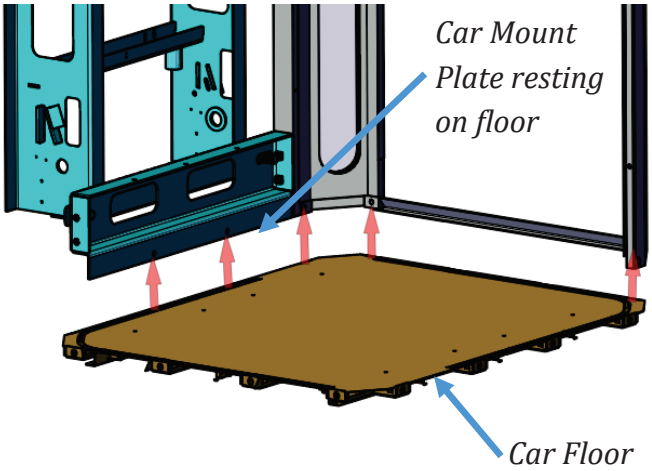


Connect the safety pan wire harness (from the bottom of the car floor) to the mating connector near the bottom of the sling.


Attach the front wall panel to the car floor with 3/8-16 X 3/4" socket head cap screws. *There are pins in the front wall panel that mate to holes in the end wall panels.*

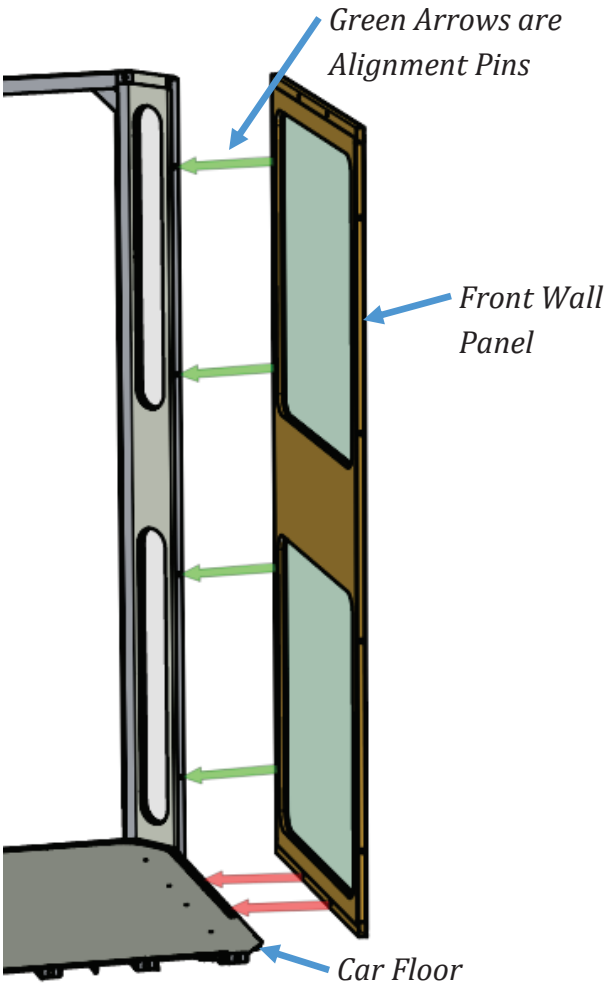


Loosely attach the opposite end wall panel to the car mount plates and car floor with 3/8-16 X 3/4" socket head cap screws.

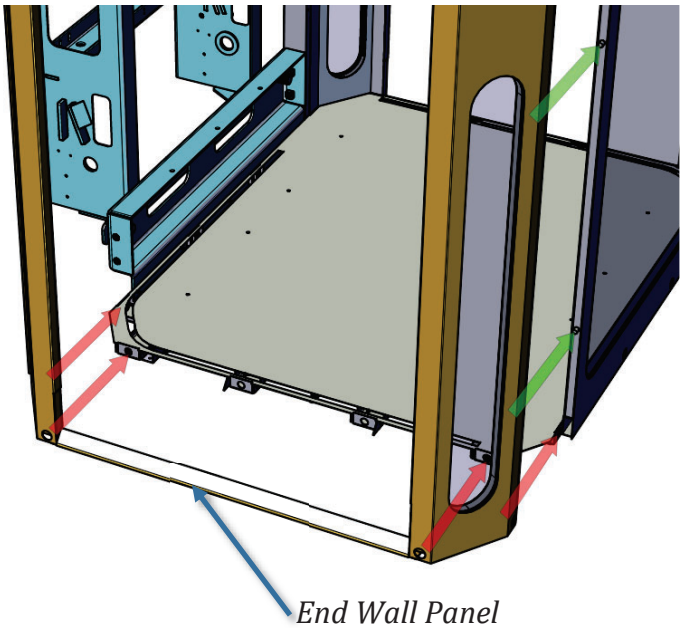

Loosely fasten the center car brace to the end walls with 3/8-16 x 3/4" socket head cap screws.

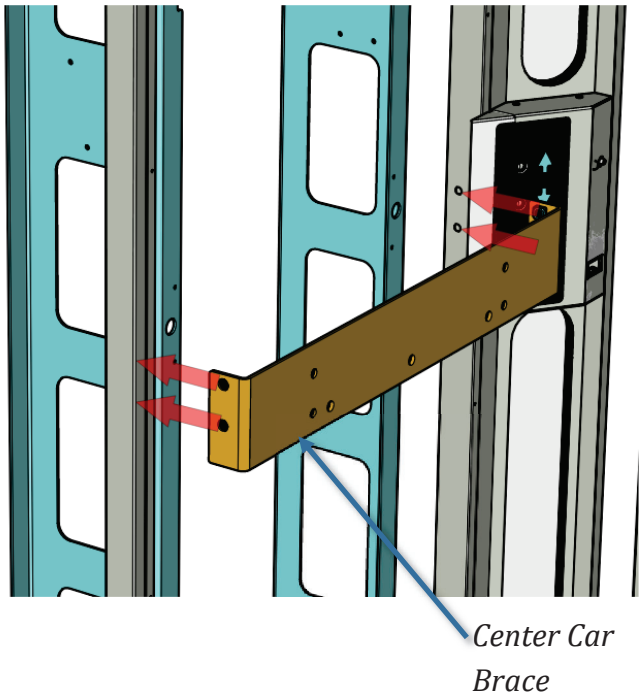

Set the car top panel onto the car and loosely fasten to front wall and car mount plate with 3/8-16 X 3/4" socket head cap screws with nylon lock nuts.

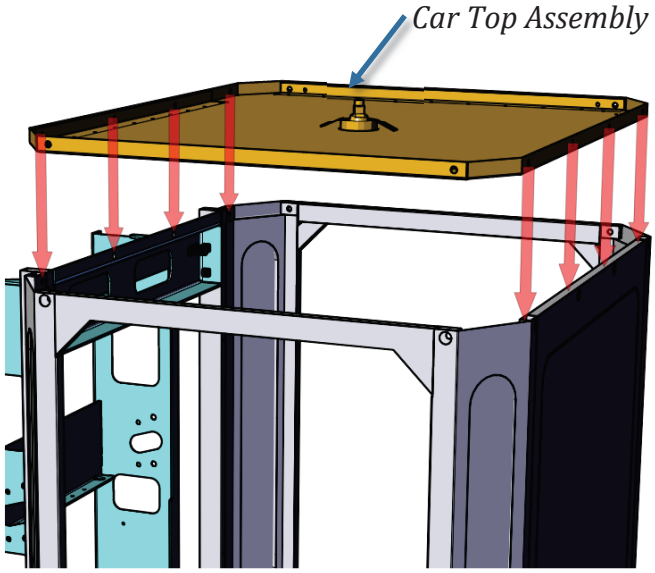

Set car top ring onto the car top panel and fasten to car end panels with 3/8-16 X 3/4" socket head cap screws.

Connect the car top wire harnesses to the mating harnesses near the top of the sling.

With the car now assembled, tighten all fasteners.

Resume the installation with the car doors on page 20 of the EZ Front Entry Installation Instructions.

